

The perfect connection


Conductor styles according to DIN EN 60228 / IEC 60228



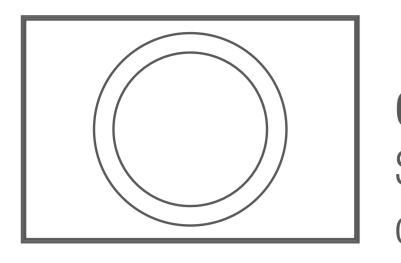




Multi stranded conductor

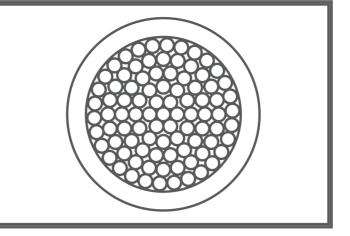

Class 5 Fine stranded conductor



Class 6 Superfine stranded conductor

TUBULAR CABLE LUGS, STANDARD TYPE, CU




Available cross sections: 6 up to 400 mm²

Established crimping profiles

Hexagonal crimping Indent crimping



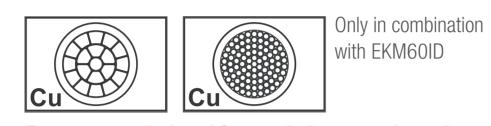

For pre-rounded multi stranded sector shaped conductors



6 up to 50 mm²


6 up to 300 mm²

10 up to 240 mm²

TUBULAR CABLE LUGS, F-SERIES, CU



Available cross sections: 10 up to 300 mm²

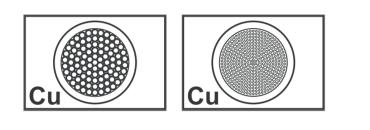

Established crimping profiles Indent crimping

Quad-point indent crimping Indent crimping






COMPRESSION CABLE LUGS TO DIN 46235, CU Established crimping profile Hexagonal crimping Available cross sections: 6 up to 1000 mm² EK50ML' EK12042*

For pre-rounded multi stranded sector shaped conductors



16 up to 300 mm²

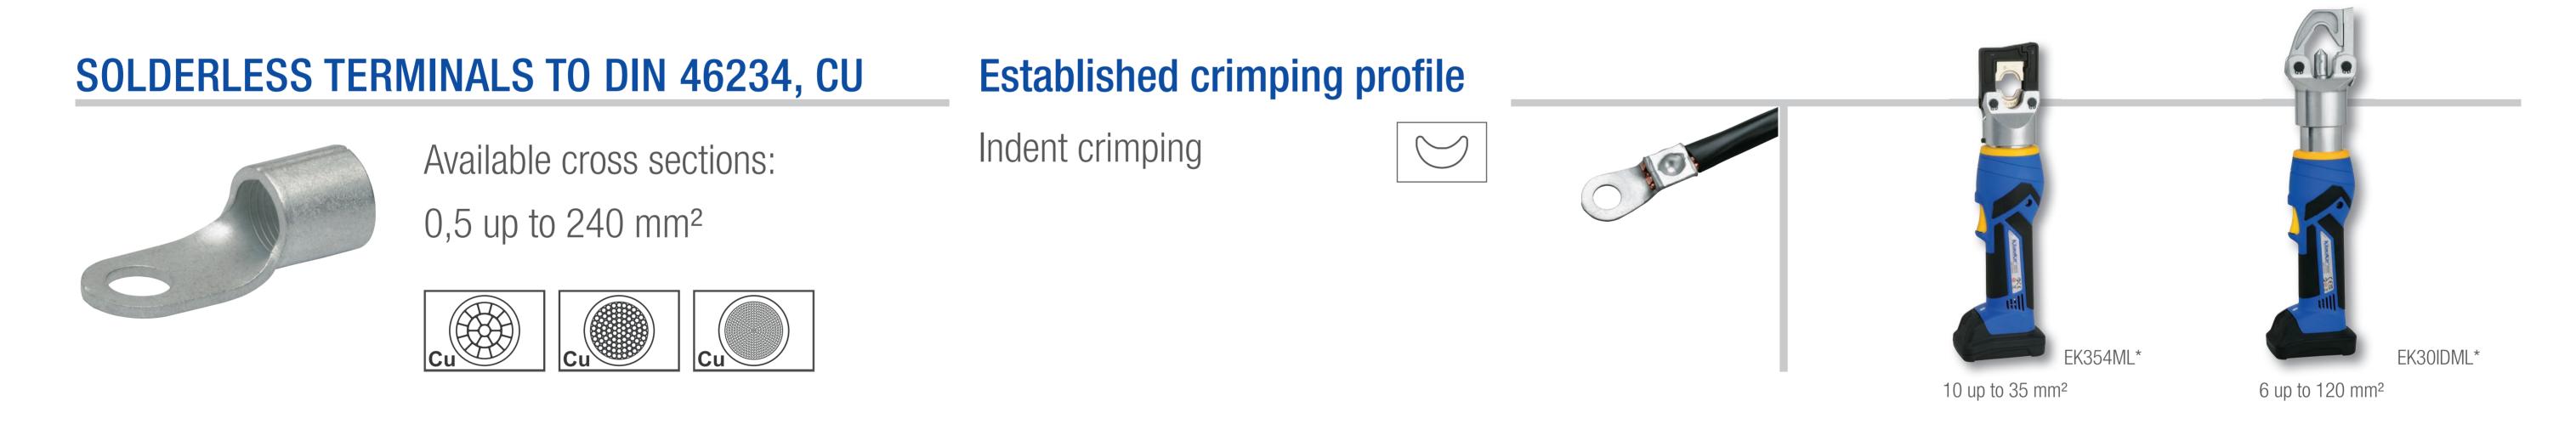


COMPRESSION CABLE LUGS TO DIN 46329





Available cross sections: 10 up to 500 mm²



For pre-rounded sector shaped conductors

Established crimping profiles


Hexagonal crimping Indent crimping








CABLE END-SLEEVES, TWIN CABLE END-SLEEVES Established crimping profiles

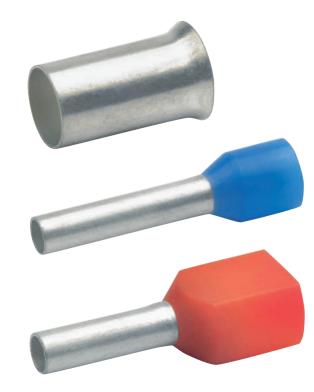

Available cross sections:

0,14 up to 240 mm²

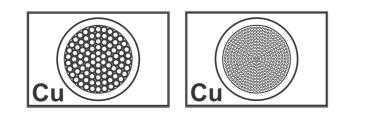

Square crimping Hexagonal crimping



* Tool example





